




CONTACT
CONFIGURATION
(MP FACE VIEW)


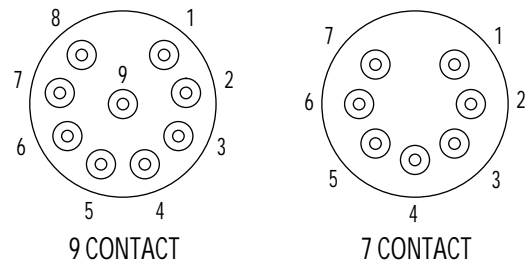


MOUNTING TORQUE FOR MBH-FS/MP	not to exceed 100 in/lbs
MATED PRESSURE RATING (psi)	20,000
DUMMY PLUG FOR MBH-FS, MIL-FS, MOM-FS	MDC-* -MP
DUMMY PLUG FOR MBH-MP, MIL-MP, MOM-MP	MDC-* -FS
NOTE: Delrin locking sleeves available (DLSA-M or F).	
* Specify number of contacts.	

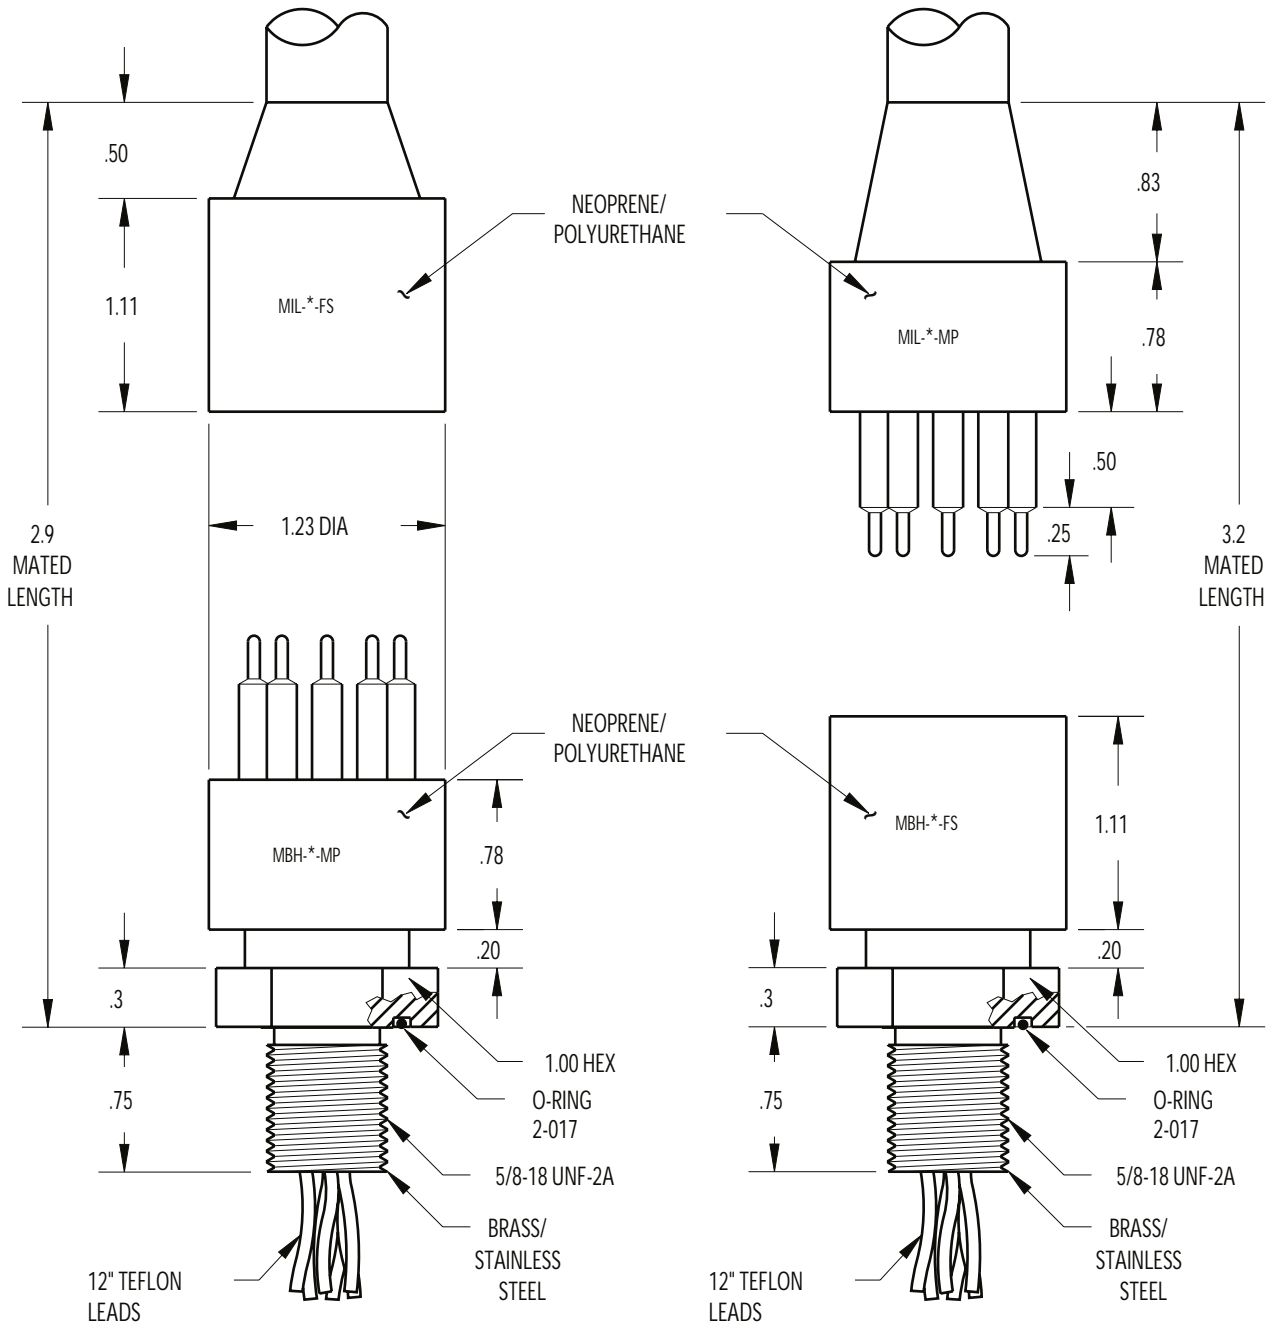

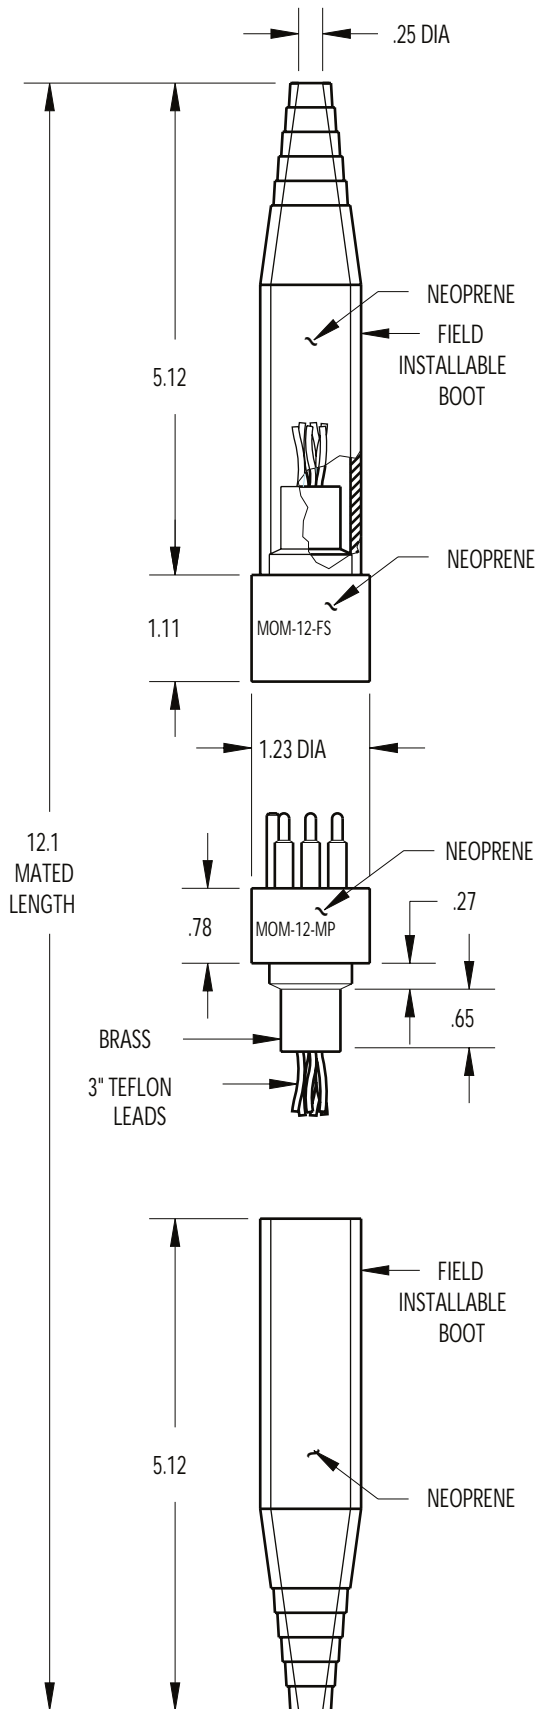


CONTACT
CONFIGURATION
(MP FACE VIEW)




MOUNTING TORQUE FOR MBH-FS/MP	not to exceed 100 in/lbs
MATED PRESSURE RATING (psi)	20,000
DUMMY PLUG FOR MBH-FS, MIL-FS, MOM-FS	MDC-*-MP
DUMMY PLUG FOR MBH-MP, MIL-MP, MOM-MP	MDC-*-FS
NOTE: Delrin locking sleeves available (DLSB-M or F).	
* Specify number of contacts.	

CONTACT
CONFIGURATION
(MP FACE VIEW)



18 CONTACT

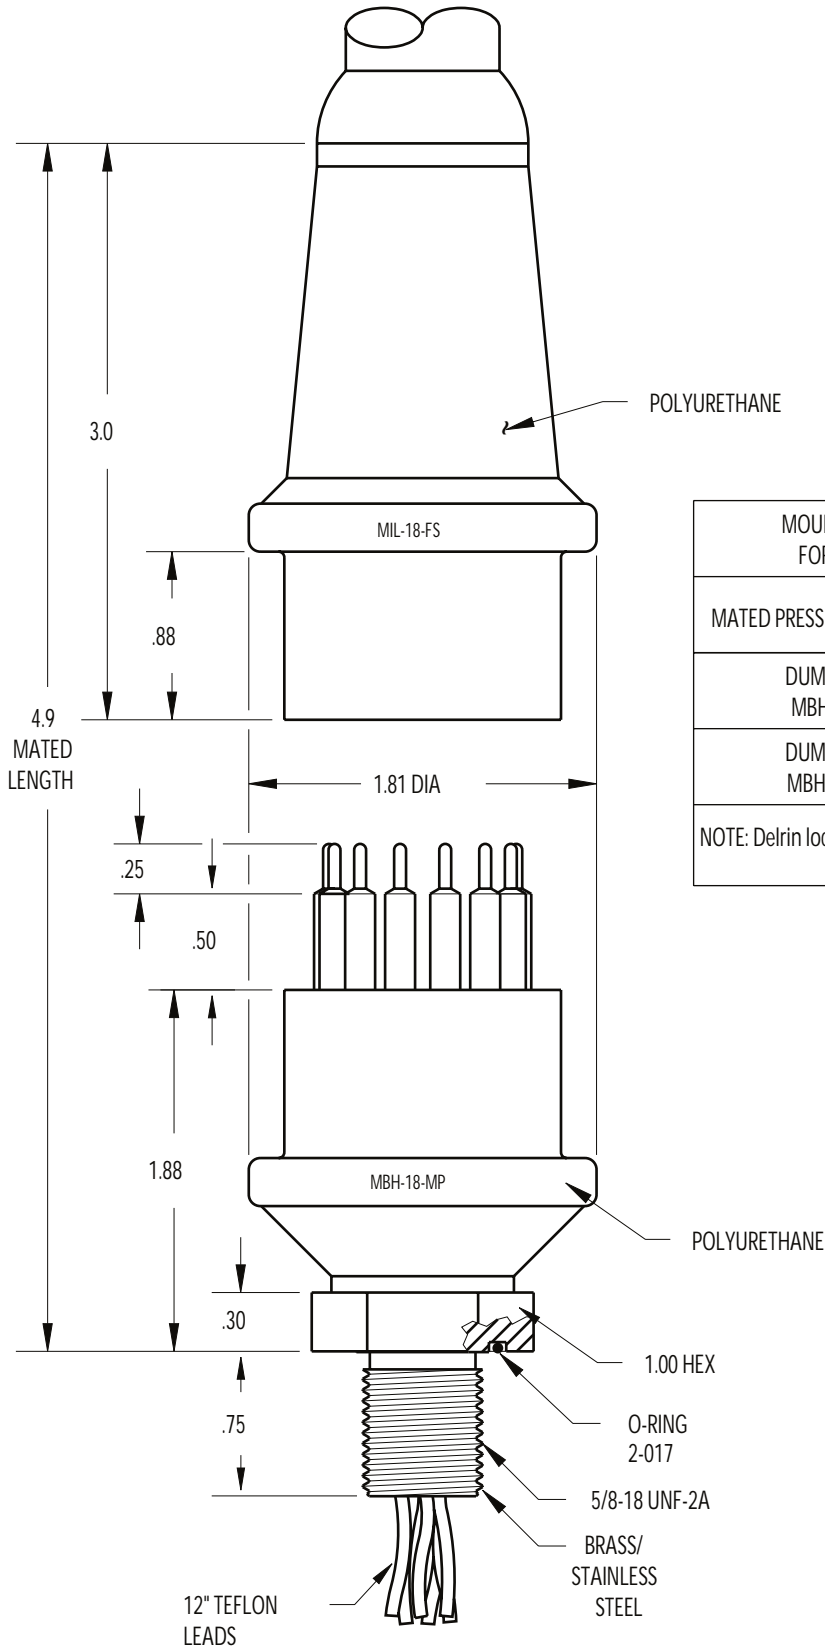

MOUNTING TORQUE FOR BH-FS/MP	not to exceed 100 in/lbs
MATED PRESSURE RATING (psi)	10,000
DUMMY PLUG FOR MBH-FS, MIL-FS	MDC-18-MP
DUMMY PLUG FOR MBH-MP, MIL-MP	MDC-18-FS
NOTE: Delrin locking sleeve available (DLSD-M or F).	

